TEST REPORT

Railway applications – Electromagnetic compatibility

Part 4: Emission and immunity of the signalling and telecommunications apparatus

Report Reference No. ..... :	422879-1TRFEMC		
Tested by (name, function and signature) ..... :	P. Barbieri	(project handler)	
Approved by (name, function and signature) ..... :	D. Guarnone	(verifier)	
Date of issue ..... :	2021-06-23		
Testing Laboratory ..... :	**Nemko Spa**		
Address ..... :	Via del Carroccio, 4 – I 20853 Biassono (MB)		
Testing location	Nemko Spa		
Address ..... :	Via del Carroccio, 4 – I 20853 Biassono (MB)		
Applicant's name ..... :	**Aesys SpA**		
Address ..... :	Via Artigiani, 41 – 24060 Brusaporto (BG) – Italy		
Test specification:			
	EN 50121-4:2016 + A1:2019 – EN 61000-4-11:2020		
Test plane ..... :	EN 61000-3-2: 2014 – EN 61000-3-3:2013 + A1:2019		
	EN 61000-4-9:2016		
	Full application of the standards		☒
	Partial application of the standards		☐
Test procedure ..... :	Nemko WM L0077, WM L0177 and WM L1002		
Test Report Form No. ..... :	50121-4TRFEMC		
TRF Originator ..... :	Nemko Spa		
Master TRF ..... :	2016-11		

Nemko Spa, 20046 Biassono (MB), Italy. All rights reserved.

This publication may be reproduced in whole for non-commercial purposes as long as the Nemko Spa is acknowledged as copyright owner and source of the material. Nemko Spa takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description ..... :	**Monitor**
Trade Mark ..... :	aesys
Manufacturer ..... :	Aesys SpA
Address of manufacturer ..... :	Via Artigiani, 41 – 24060 Brusaporto (BG) – Italy
Code ..... :	993202033501
Model name ..... :	CPTOU4615 LS P1L3ARIO2HS24G1WTTSPFACZ0
Ratings ..... :	220 – 240 V~, 50 / 60 Hz

This test report shall not be partially reproduced without the prior written consent of Nemko S.p.A. The phase of sampling of equipment under test is carried out by the customer. Results indicated in this test report refer exclusively to the tested samples and apply to the sample as received. This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

Test Report No. :	422879-1TRFEMC	2021-06-23 Date of issue

Short description of the EuT	Copy of marking plate
The E.U.T. a information monitor provided with an internal PC. The EUT use the following separatly approved radio module: - LTE/HSPA+/GSM module SIMCom model SIM7100E-PCIE - WIFI radio module Sparklan model WUBA-171GN - PMR radio module Elancitè model NF S32-002 - Antenna type Invax model DR70 The EUT is provided also with a slim soundbar code 993301701000 (Slim Soudbar 46" MC).	

Number of tested samples:	1
Serial number:	899707
Electromagnetic environment:	Railway
Device type:	Equipment for fixed use
Accessories and detachable parts included:	The E.U.T. is composed of a single unit
Testing	
Date of receipt of test sample:	2021-05-13
Testing commenced on:	2021-05-17
Testing concluded on:	2021-06-21
Possible test case verdicts:	
test case does not apply to the test object:	N (Not applicable)
test object does meet the requirement:	P (Pass)
test object does not meet the requirement:	F (Fail)

Symbols used in this test report

☒ The crossed square indicates that the listed condition or equipment is applicable for this report.

☐ The empty square indicates that the listed condition or equipment is not applicable for this report.

Throughout this report point is used as decimal separator.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

Verdict according to the standards listed at page 5:	**Pass**

PROJECT HISTORY		
Report number	**Modification to the report / comments**	**Date**
422879-1TRFEMCFAIL	First release	2021-05-28
422879-1TRFEMC	Repeated Burst test with a ferrite on the Ethernet cable	2021-06-23
--	--	--
REMARKS		
--		

PRODUCT VARIANTS		
Variant model	**Difference against the main model**	**Additional test performed**
--	--	--
--	--	--
--	--	--
--	--	--
REMARKS		
--		

Contents

1 TEST STANDARDS 5

2 SUMMARY OF TEST RESULTS 7

3 EQUIPMENT UNDER TEST 8

3.1 POWER SUPPLY SYSTEM UTILISED 8
3.2 EUT OPERATION MODES 8
3.3 EUT CONFIGURATION MODES 8
3.4 INPUT/OUTPUT PORTS 8
3.5 EQUIPMENT USED DURING TEST 9
3.6 PERFORMANCE LEVEL 9

4 TEST ENVIRONMENT 11

4.1 ADDRESS OF THE TEST LABORATORY 11
4.2 ENVIRONMENTAL CONDITIONS 11
4.3 STATEMENT OF THE MEASUREMENT UNCERTAINTY 11

5 TEST CONDITIONS AND RESULTS 13

5.1 RADIATED DISTURBANCE IN THE FREQUENCY RANGE 30 MHZ TO 6000 MHZ 13
5.2 CONDUCTED DISTURBANCE IN THE FREQUENCY RANGE 150 KHZ TO 30 MHZ 19
5.3 DISCONTINUOUS DISTURBANCE 24
5.4 HARMONICS OF CURRENT 26
5.5 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER 29
5.6 IMMUNITY TO ELECTROSTATIC DISCHARGES 31
5.7 IMMUNITY TO RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD 33
5.8 IMMUNITY TO ELECTRICAL FAST TRANSIENT/BURST 35
5.9 IMMUNITY TO SURGE 37
5.10 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS 39
5.11 IMMUNITY TO POWER FREQUENCY MAGNETIC FIELD 41
5.12 IMMUNITY TO VOLTAGE DIPS AND INTERRUPTIONS 43
5.13 IMMUNITY TO PULSE MAGNETIC FIELD 45

6 EUT PHOTOS 47

1 TEST STANDARDS

The tests were performed according to following standards and procedures.

NEMKO WM L0177: General routines for using instruments at Nemko

NEMKO WM L1002: Measurement Uncertainty - Policy and Statement

NEMKO WM L0077: General routines to perform EMC tests

EN 50121-4:2016 + A1:2019
Railway applications - Electromagnetic compatibility -- Part 4: Emission and immunity of the signalling and telecommunications apparatus

EN 61000-3-2:2014
Electromagnetic compatibility (EMC) — Part 3-2: Limits — Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)

EN 61000-3-3:2013 + A1:2019
Electromagnetic compatibility (EMC) -- Part 3-3: Limits — Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection

EN 61000-4-9:2016
Electromagnetic compatibility (EMC) -- Part 4-9: Testing and measurement techniques - Pulse magnetic field immunity test

EN 61000-4-11:2020
Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests

The main standard(s) above contains references to other standards which are listed below.

EN 50121-1:2017
Railway applications — Electromagnetic compatibility — Part 1: General

EN 50121-1:2006 + A1:2008
Railway applications — Electromagnetic compatibility — Part 1: General

EN 61000-6-4:2007 + A1:2011
Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission standard for industrial environments

EN 55016-2-1:2009
Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-1: Methods of measurement of disturbances and immunity – Conducted disturbance measurements

EN 55016-2-3:2010
Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-3: Methods of measurement of disturbances and immunity – Radiated disturbance measurements

EN 55022 2010
Information technology equipment – Radio disturbance characteristics - Limits and methods of measurement

EN 61000-4-2:2009
Electromagnetic compatibility (EMC) -- Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test

EN 61000-4-3:2006 + A1:2008 + A2:2010
Electromagnetic compatibility (EMC) -- Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test

EN 61000-4-4:2012
Electromagnetic compatibility (EMC) -- Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test

EN 61000-4-5:2014
Electromagnetic compatibility (EMC) -- Part 4-5: Testing and measurement techniques - Surge immunity test

EN 61000-4-6:2014
Electromagnetic compatibility (EMC) -- Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields

EN 61000-4-8:2010
Electromagnetic compatibility (EMC) -- Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test

2 SUMMARY OF TEST RESULTS

Emission requirements		
Requirement – Test	**Ref standard**	**Verdict**
Enclosure port – Radiated disturbance	EN 55016-2-3	P
AC or DC power ports – Conducted disturbance	EN 55016-2-1	P
AC or DC power ports – Discontinuous disturbance	EN 55016-2-1	P
Telecommunications/network ports – Conducted disturbance	EN 55022	P
Harmonic current emissions	EN 61000-3-2	P
Voltage changes, voltage fluctuations and flicker	EN 61000-3-3	P
Immunity requirements		
Requirement - Test	**Ref standard**	**Verdict**
Electrostatic discharge	EN 61000-4-2	P
Radio-frequency electromagnetic field	EN 61000-4-3	P
Fast transients	EN 61000-4-4	P
Surges	EN 61000-4-5	P
Radio-frequency common mode	EN 61000-4-6	P
Power frequency magnetic field	EN 61000-4-8	P
Voltage dips and short interruptions	EN 61000-4-11	P
GENERAL REMARKS		

3 EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage:	☒	230 V / 50 Hz / 1ϕ	☐	230 V / 60 Hz / 1ϕ
	☐	400V / 50 Hz 3PE	☐	400 V / 50 Hz 3NPE
	☐	12 V DC	☐	24 V DC

3.2 EuT operation modes

Mode	Description
1	Normal working displaying a video and a sound, and with all the radio modules linked

3.3 EuT configuration modes

Emission: the EuT was configured to measure its highest possible radiation level. The test modes selected are according to EuT instruction manual. Immunity: the EuT was configured to have its highest possible susceptibility against tested phenomena. The test modes selected are according to EuT instruction manual.

Mode	Description
1	The EUT has been connected to the mains with the Ethernet cable connected to a PC. The WIFI radio module was connected to an access point. The LTE/HSPA+/GSM radio module was connected to a radio communication tester. The PMR radio module was controlled by an external remote control.

3.4 Input/Output Ports

Port	Name	Type*	Cable Max. >3m	Cable Shielded	Description
0	Enclosure	N/E	—	—	—
1	AC mains	AC	☒	☐	Three wires cable
2	Ethernet line	TP	☒	☒	Standard cable

*Note:

AC = AC Power Port DC = DC Power Port N/E = Non-Electrical

I/O = Signal/Control Input or Output Ports TP = Telecommunication Ports ANT = Antenna Ports

3.5 Equipment Used During Test

Use*	Product Type	Manufacturer	Model	Comments
AE	PC	—	—	—
AE	Radio communication tester	R&S	CMW 290	—
AE	PMR Remote control	Okeenea	TX1-BUZ	—
AE	IR Remote control	Meliconi	Speedy 2 combo	—
Note: * EUT - Equipment Under Test AE - Auxiliary/Associated Equipment (Not Subjected to Test) SIM - Simulator (Not Subjected to Test)				

3.6 Performance level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

☐	based on the used product standard
☒	based on the declaration of the manufacturer, requestor or purchaser

Performance criterion A: The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is selfrecoverable or can be restored by the operation of the controls.

The right work of the EUT has been check with the “ping” windows command and with a dedicated browser page (UDisplay – see the below). The PMR radio module has been check reproducing a vocal message after pressing a button on the remote control. Loss of link with radio module was not allowed. Distortion on the displayed video was not allowed.

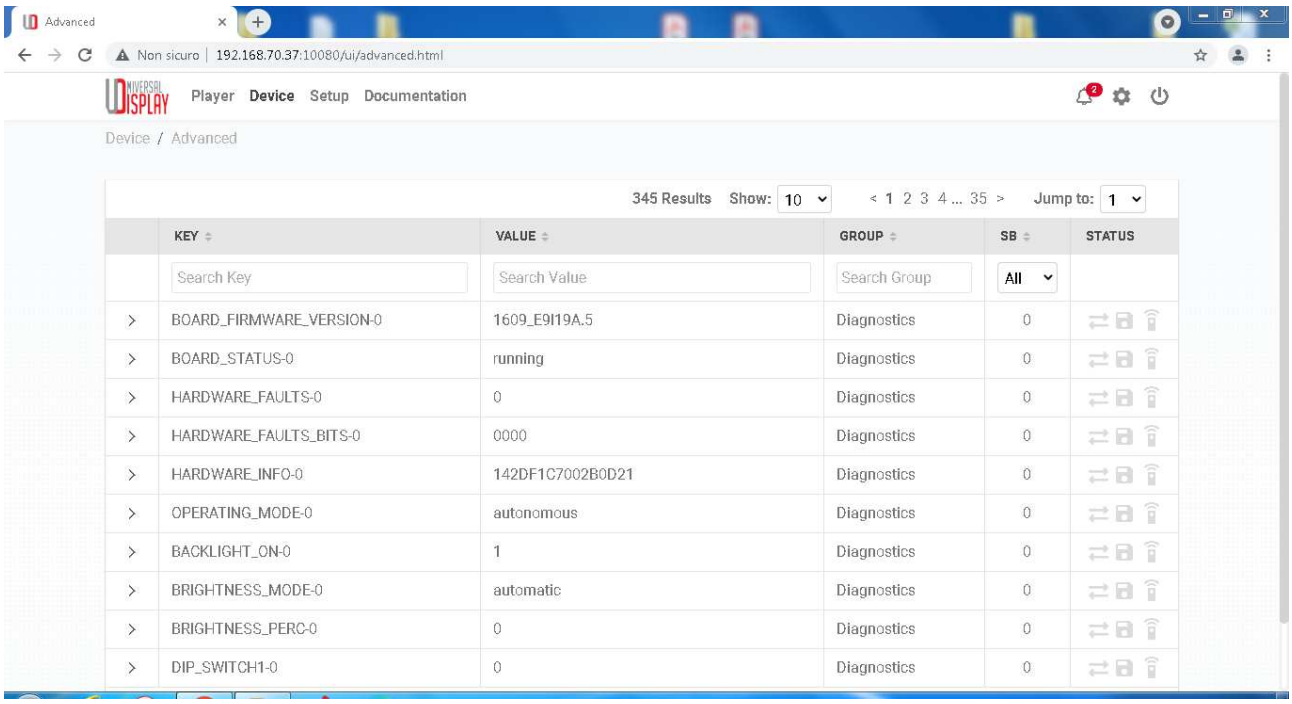
Advanced
Non sicuro | 192.168.70.37:10080/ui/advanced.html
Player Device Setup Documentation
Device / Advanced
345 Results Show: 10 < 1 2 3 4 ... 35 > Jump to: 1
KEY VALUE GROUP SB STATUS
Search Key Search Value Search Group All
BOARD_FIRMWARE_VERSION-0 1609_E9I19A.5 Diagnostics 0
BOARD_STATUS-0 running Diagnostics 0
HARDWARE_FAULTS-0 0 Diagnostics 0
HARDWARE_FAULTS_BITS-0 0000 Diagnostics 0
HARDWARE_INFO-0 142DF1C7002B0D21 Diagnostics 0
OPERATING_MODE-0 autonomous Diagnostics 0
BACKLIGHT_ON-0 1 Diagnostics 0
BRIGHTNESS_MODE-0 automatic Diagnostics 0
BRIGHTNESS_PERC-0 0 Diagnostics 0
DIP_SWITCH1-0 0 Diagnostics 0

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Nemko Spa
Via del Carroccio, 4
20853 Biassono Biassono (MB) – Italy

4.2 Environmental conditions

In the laboratory, the following ambient conditions are respected for each test reported below:

Ambient temperature:	18 ÷ 33 °C (1)
Relative Humidity:	25 ÷ 70 % (2)
Atmospheric pressure:	860 ÷ 1060 hPa

(1) For luminaire, temperature during tests was verified to be within 18 ÷ 30 °C
(2) During ESD test, humidity was verified to be within 30 ÷ 60 %

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model	Serial N°
Thermo-hygrometer data loggers	Testo	175-H2	20012380/305
Thermo-hygrometer data loggers	Testo	175-H2	38203337/703
Barometer	Castle	GPB 3300	072015

4.3 Statement of the measurement uncertainty

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Disturbance 10m Chamber	Antenna distance 3 m, 10 m 0.009 ÷ 200 MHz	5.0 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 200 ÷ 1000 MHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 1 ÷ 6 GHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m 6 ÷ 18 GHz	5.5 dB	(1)
	Antenna distance 1 m, 3 m 18 ÷ 40 GHz	7.2 dB	(1)
Radiated Disturbance with large loop antenna system (LLAS)	0.009 ÷ 30 MHz	3.3 dB	(1)
Conducted Disturbance	0.02 ÷ 150 kHz with AMN	3.8 dB	(1)
	150 kHz ÷ 30 MHz with AMN	3.4 dB	(1)
	150 kHz ÷ 30 MHz with AAN	4.6 dB	(1)
	9 kHz ÷ 30 MHz with voltage probe	2.9 dB	(1)
	150 kHz ÷ 30 MHz with current probe	2.9 dB	(1)
Clicks	9 ÷ 150 kHz	3.8 dB	(1)
	150 kHz ÷ 30 MHz	3.4 dB	(1)
Disturbance Power	30 MHz ÷300 MHz	4.5 dB	(1)
Frequency	10 Hz ÷ 1 kHz	0.2 %	(1)
	1 kHz ÷ 40 GHz	10^{-6}	(1)
Harmonic Current Emission	50 Hz ÷ 2 kHz	3 %	(1)
Fluctuation and Flikers	Fluctuation	0.05 %	(1)
	Flikers	5 %	(1)
Radiated Immunity Anechoic Chambers	20 MHz ÷ 6 GHz	3.4 dB	(1) (3)
Radiated Immunity TEM Cell	0.01 ÷ 200 MHz	3.0 dB	(1) (3)
Bulk Current	1 ÷ 200 MHz	3.0 dB	(1)
Immunity to conducted disturbances	9 kHz ÷ 230 MHz	3.0 dB	(1)
ESD Immunity	Voltage, Current, Rise time, Duration	(2)	(1)
Burst Immunity	Voltage, frequency, burst period and duration, rise time and pulse width	(2)	(1)
Surge Immunity	Voltage, Current, Rise time, Duration	(2)	(1)
DIPS, Interruption and Voltage duration Immunity	Amplitude	5 %	(1)
	Duration	5 %	
Impulse Magnetic Field Immunity	Peak Current	10 %	(1) (3)
	Rise time, Duration	20 %	
Power Frequency Magnetic Field Immunity	16.7 Hz, 50 Hz, 60 Hz	2.0 dB	(1) (3)
Damped Oscillatory Wave Immunity Ring Wave Immunity	Voltage, front time, frequency 100 kHz, 1 MHz	(2)	(1)
Damped Magnetic Field	Amplitude: 100 kHz, 1 MHz	3 dB	(1)
	Frequency: 100 kHz, 1 MHz	10 %	
Low Frequency Immunity	15 Hz ÷ 150 kHz	2.2 dB	(1)
Automotive transients Immunity	Voltage, rise time, duration time Impulses 1, 2a, 2b, 3a, 3b and 4	(2)	(1)
Automotive transients Emission	Amplitude, Time	10 %	(1)
EMF for Lighting Equipment	-	25 %	(1)
Electromagnetic fields (EMF)	Magnetic, Electric and Electromagnetic fields: 0 Hz ÷ 40 GHz	25 %	(1)
Electrical quantities (voltage, current, resistance)	AC/DC Voltage 10 mV ÷ 1000 V 0÷100 kHz AC/DC Current 0.1 mA ÷ 400 A 0÷1 kHz Resistance 100 mΩ ÷ 10 MΩ	2.5 %	(1)

NOTES:
(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k = 2, which for a normal distribution corresponds to a coverage probability of approximately 95 %
(2) The instruments used for this immunity test is according to the tolerances requested by the applicable standard
(3) The reported expanded uncertainty of measurement is related to the stimulus quantity

5 TEST CONDITIONS AND RESULTS

5.1 Radiated disturbance in the frequency range 30 MHz to 6000 MHz

5.1.1 Photo documentation of the test set-up

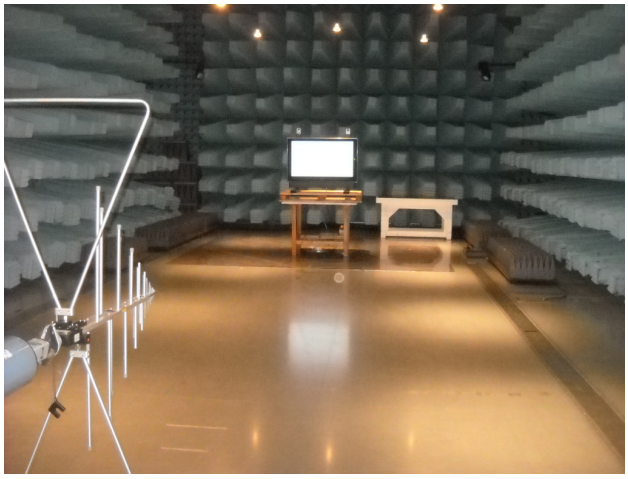

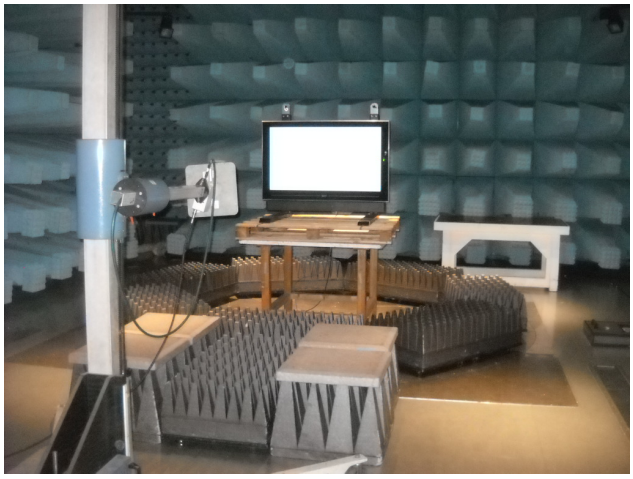

5.1.2 Test method according to EN 55016

Measurements were made on a semi anechoic chamber. Preliminary measurements were performed at an antenna to EUT separation distance of 10 meters and 3 meters with the receive antenna located at a fixed height (from 1 to 4 meter) in both horizontal and vertical polarities. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 meters. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.

5.1.3 Limits for enclosure

Frequency (MHz)	Limit (dBµV/m) – Quasi-Peak
30 TO 230	40
230 TO 1000	47

Frequency (MHz)	Limit (dBµV/m) – Average	Limit (dBµV/m) – Peak
1000 TO 3000	56	76
3000 TO 6000	60	80

5.1.4 Test result

Verdict:	☒ P ☐ F ☐ N
Frequency range:	30 MHz – 6000 MHz
Kind of test site:	Semi anechoic chamber
Measurement distance:	10 m and 3 m

Remarks:

- If the highest internal frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.
- If the highest internal frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.
- If the highest internal frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.
- If the highest internal frequency of the EUT is above 1 GHz, the measurement shall be made up to 6 GHz.
- Where the highest internal frequency is not known, tests shall be performed up to 6 GHz.

5.1.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Trilog Broadband Antenna	Schwarzbeck	VULB 9162	9162-025
Bilog antenna (1 ÷ 18 GHz)	Schwarzbeck	STLP 9148	9148-123
Broadband preamplifier (1 ÷ 18 GHz)	Schwarzbeck	BBV 9718	9718-137
EMI receiver (2 Hz ÷ 44 GHz)	R&S	ESW44	101620
Controller	Maturo	FCU3.0	10041
Tilt antenna mast	Maturo	TAM4.0-E	10042
Turntable	Maturo	TT4.0-5T	2.527
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530
Shielded room	Siemens	10m control room	1947

5.1.6 Test protocol

Antenna polarization: Horizontal Verdict: Pass
Operation mode: 1
Configuration mode: 1
Remarks: Frequency range: 30 MHz to 1 GHz @ 10 m

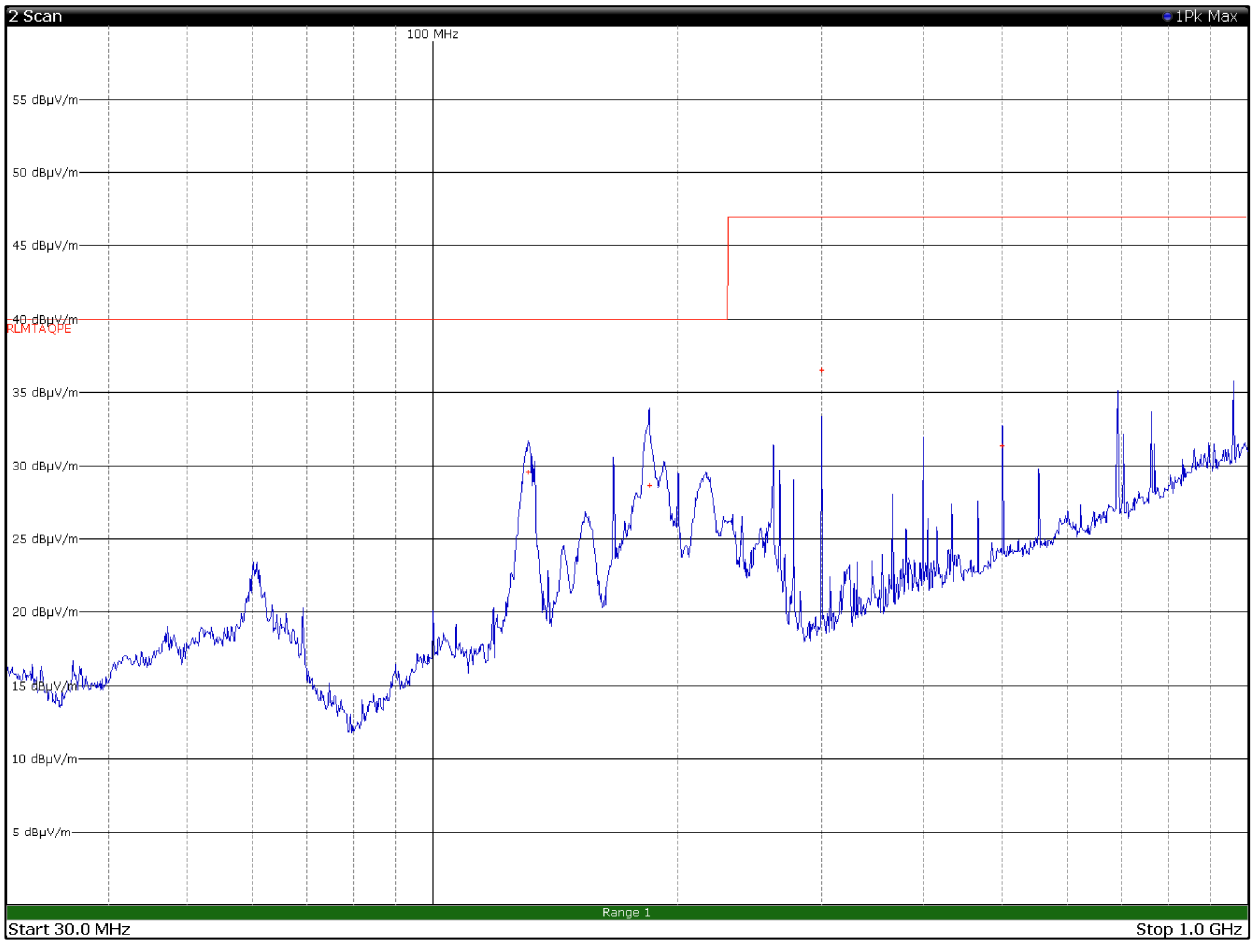

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
130.8600	29.6	40.0	-10.4	QP
184.3200	28.7	40.0	-11.3	QP
300.0000	36.5	47.0	-10.5	QP
500.0100	31.4	47.0	-15.6	QP

Antenna polarization: Vertical Verdict: Pass
Operation mode: 1
Configuration mode: 1
Remarks: Frequency range: 30 MHz to 1 GHz @ 10 m

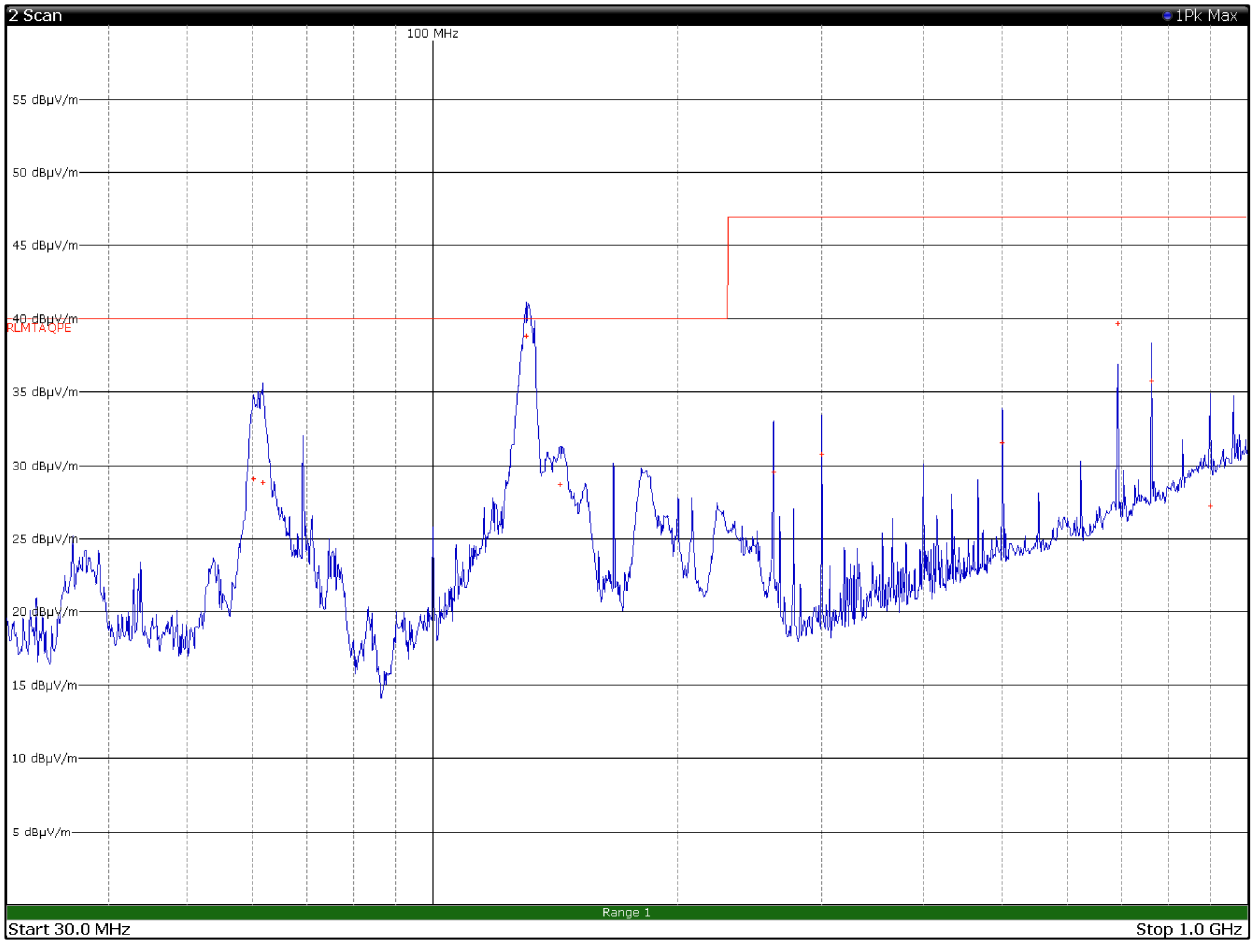

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
60.2700	29.1	40.0	-10.9	QP
61.8900	28.9	40.0	-11.1	QP
130.2900	38.8	40.0	-1.2	QP
143.0700	28.8	40.0	-11.2	QP
261.8400	29.6	47.0	-17.4	QP
300.0000	30.8	47.0	-16.2	QP
500.0100	31.6	47.0	-15.4	QP
692.3700	39.7	47.0	-7.3	QP
761.6700	35.8	47.0	-11.2	QP
900.1500	27.3	47.0	-19.7	QP

Antenna polarization: Horizontal Verdict: Pass
Operation mode: 1
Configuration mode: 1
Remarks: Frequency range: 1 GHz to 6 GHz @ 3 m

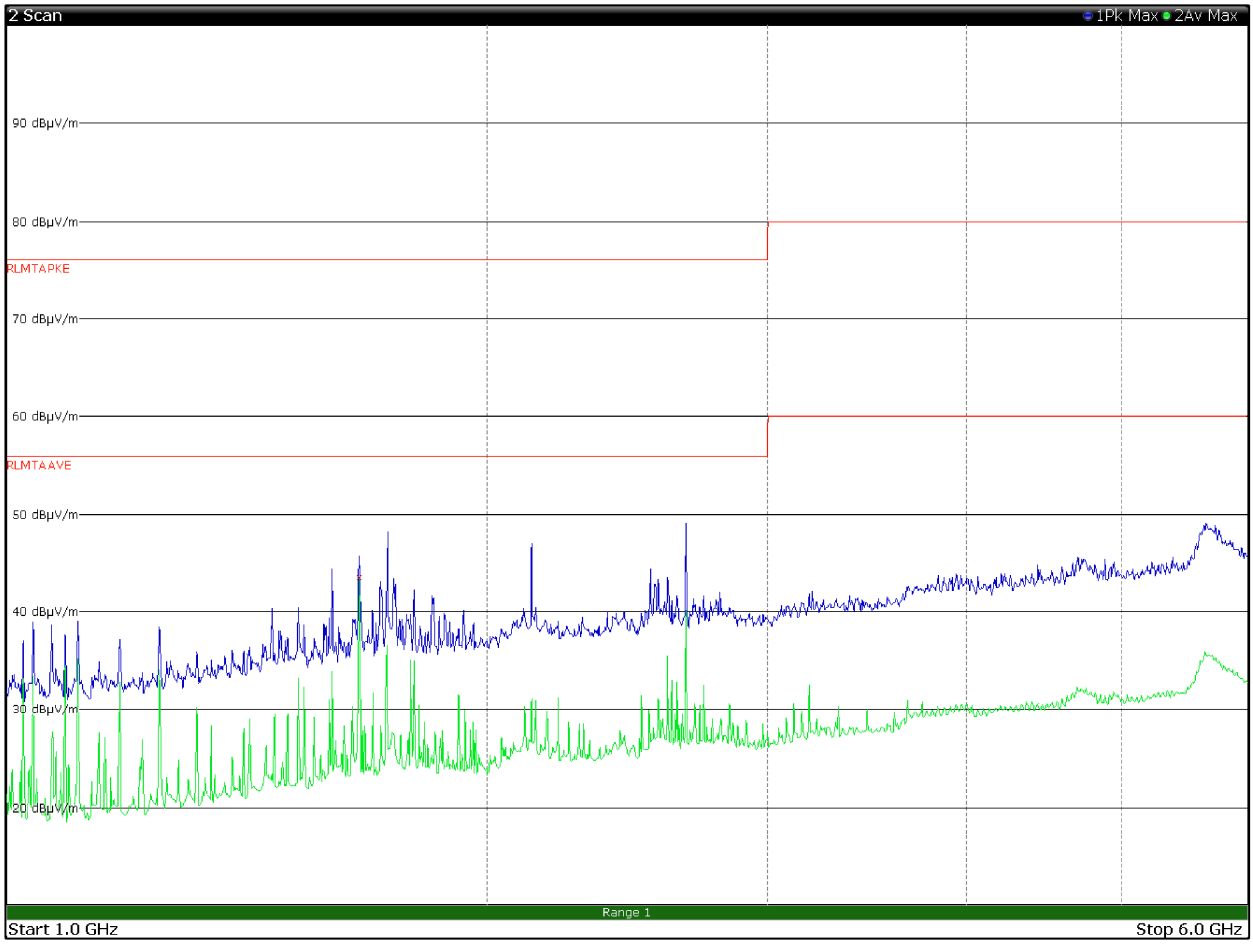

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1664.0000	43.6	56.0	-12.4	Av

Antenna polarization: Vertical
Operation mode: 1
Configuration mode: 1
Remarks: Frequency range: 1 GHz to 6 GHz @ 3 m

Verdict: Pass

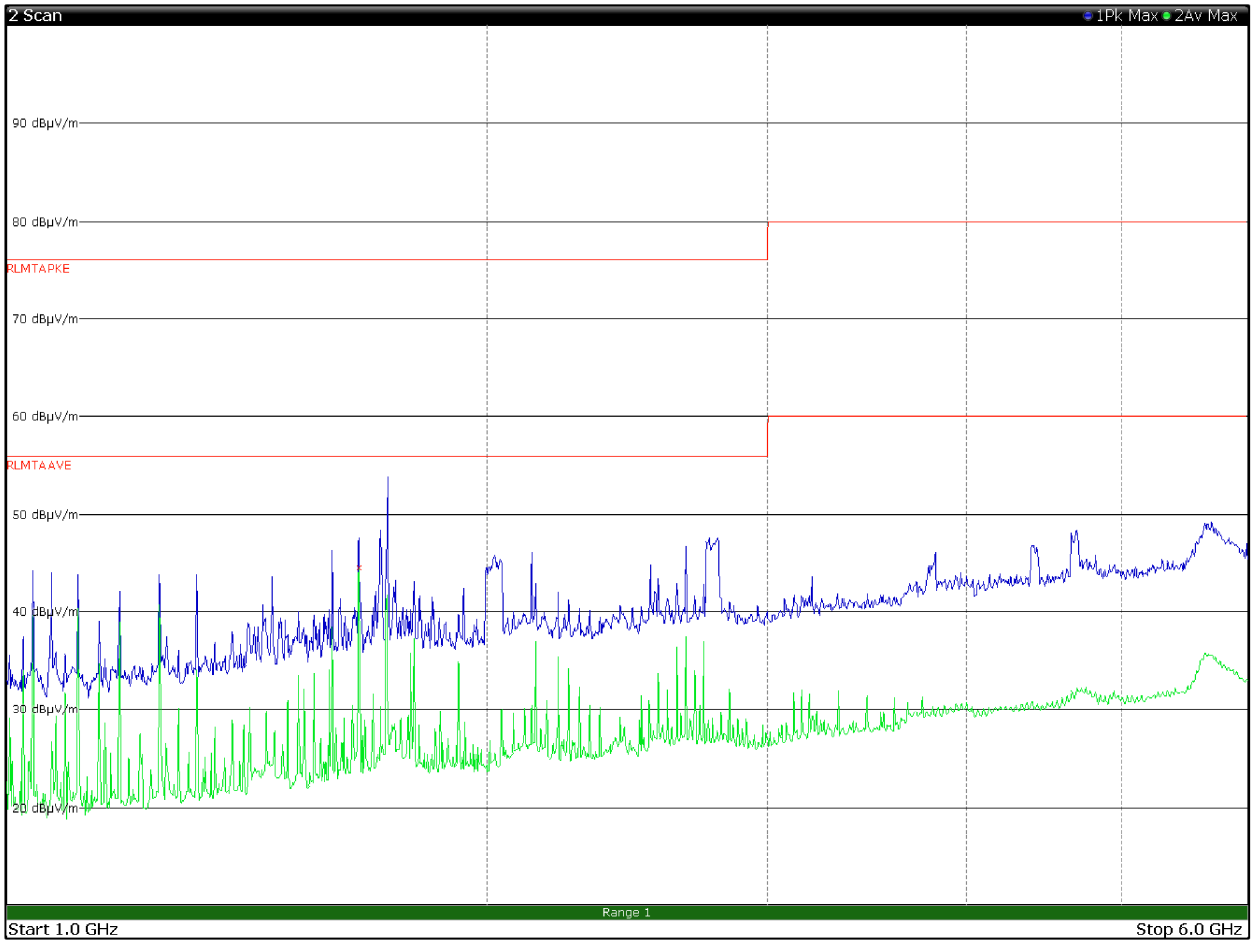

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1662.0000	44.6	56.0	-11.4	Av

5.2 Conducted disturbance in the frequency range 150 kHz to 30 MHz

5.2.1 Photo documentation of the test set-up

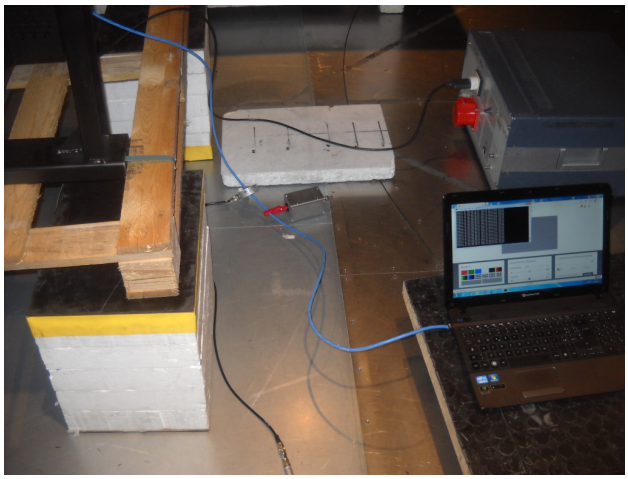

5.2.2 Test method according to EN 55016 and EN 55022

Measurements were made on a ground plane that extends one meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). Conducted voltage measurements on mains lines were made at the output of the LISN. All tested telecommunications lines were connected to an Impedance Stabilization Network (ISN) and conducted voltage measurements on telecommunications lines were made at the output of the ISN. Where an ISN was not appropriate or available measurements were made using a Capacitive Voltage Probe and Current probe.

5.2.3 Limits for AC or DC power ports

Frequency (MHz)	Limit (dBµV) – Quasi-Peak	Limit (dBµV) – Average
0.15 TO 0.50	79	66
0.50 TO 30	73	60

5.2.4 Limits for telecommunications/network ports

Frequency (MHz)	Limit (dBµV) – Quasi-Peak	Limit (dBµV) – Average
0.15 TO 0.50	97 to 87*	84 to 74*
0.50 TO 30	87	74

*The limits decrease linearly with the logarithm of the frequency

Frequency (MHz)	Limit (dBµA) – Quasi-Peak	Limit (dBµA) – Average
0.15 TO 0.50	53 to 43*	40 to 30*
0.50 TO 30	43	30

*The limits decrease linearly with the logarithm of the frequency

5.2.5 Test result

Verdict for AC power port:	☒ P ☐ F ☐ N
Verdict for DC power port:	☐ P ☐ F ☒ N
Verdict for TLC/network port:	☒ P ☐ F ☐ N
Frequency range:	0.15 MHz – 30 MHz
Kind of test site:	Shielded room
Remarks:	

5.2.6 Test equipment used

Equipment	Manufacturer	Model	Serial N°
EMI receiver (2 Hz ÷ 44 GHz)	R&S	ESW44	101620
LISN 9 kHz ÷ 30 MHz	R&S	ESH2-Z5	872 460/041
Current clamp probe	R&S	ESH2-Z1	891 923/18
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530
Shielded room	Siemens	10m control room	1947

5.2.7 Test protocol

Test point: Phase line Verdict: Pass
Operation mode: 1
Configuration mode: 1
Remarks: --

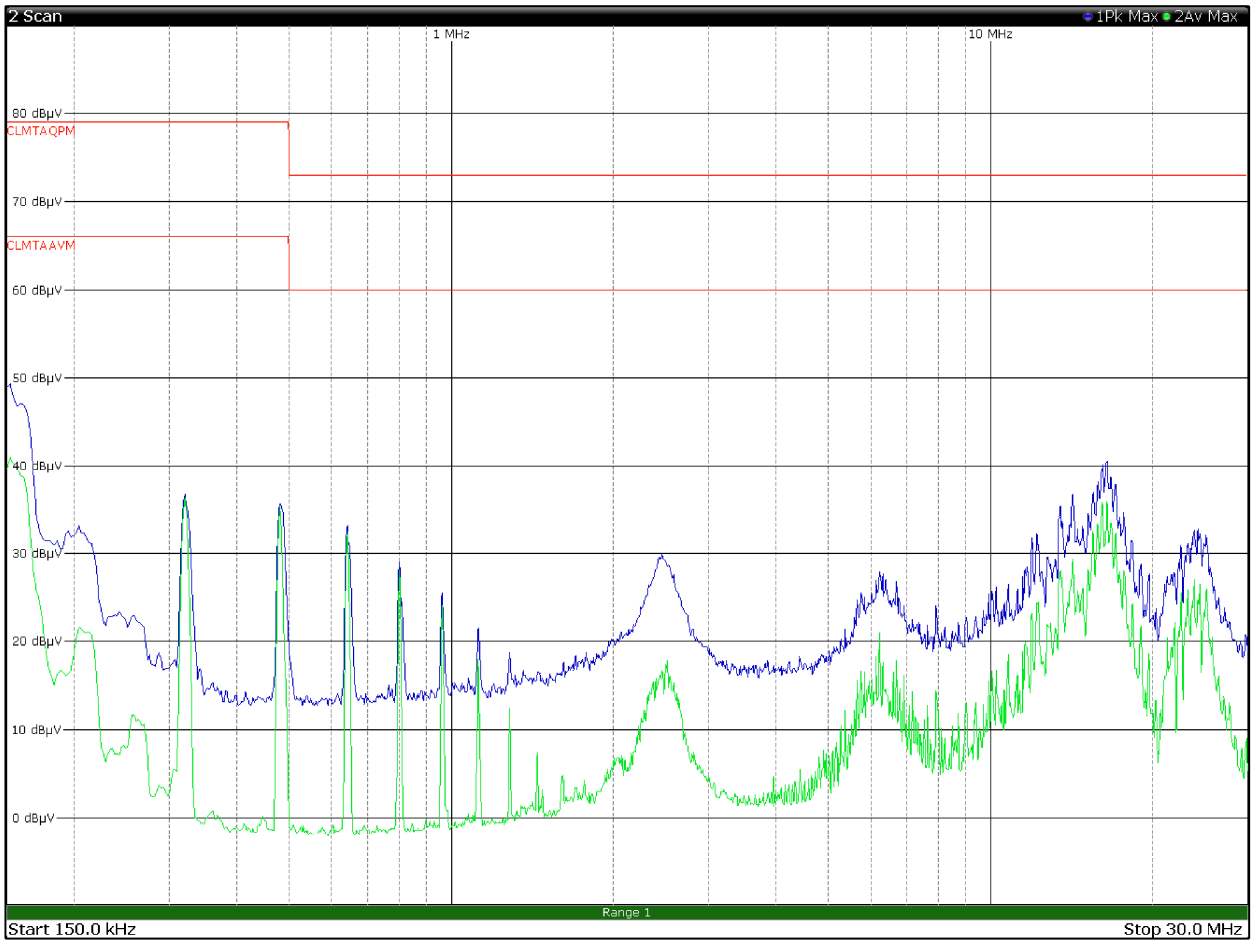

Test point:	Neutral line	Verdict: Pass
Operation mode:	1	
Configuration mode:	1	
Remarks:	--	

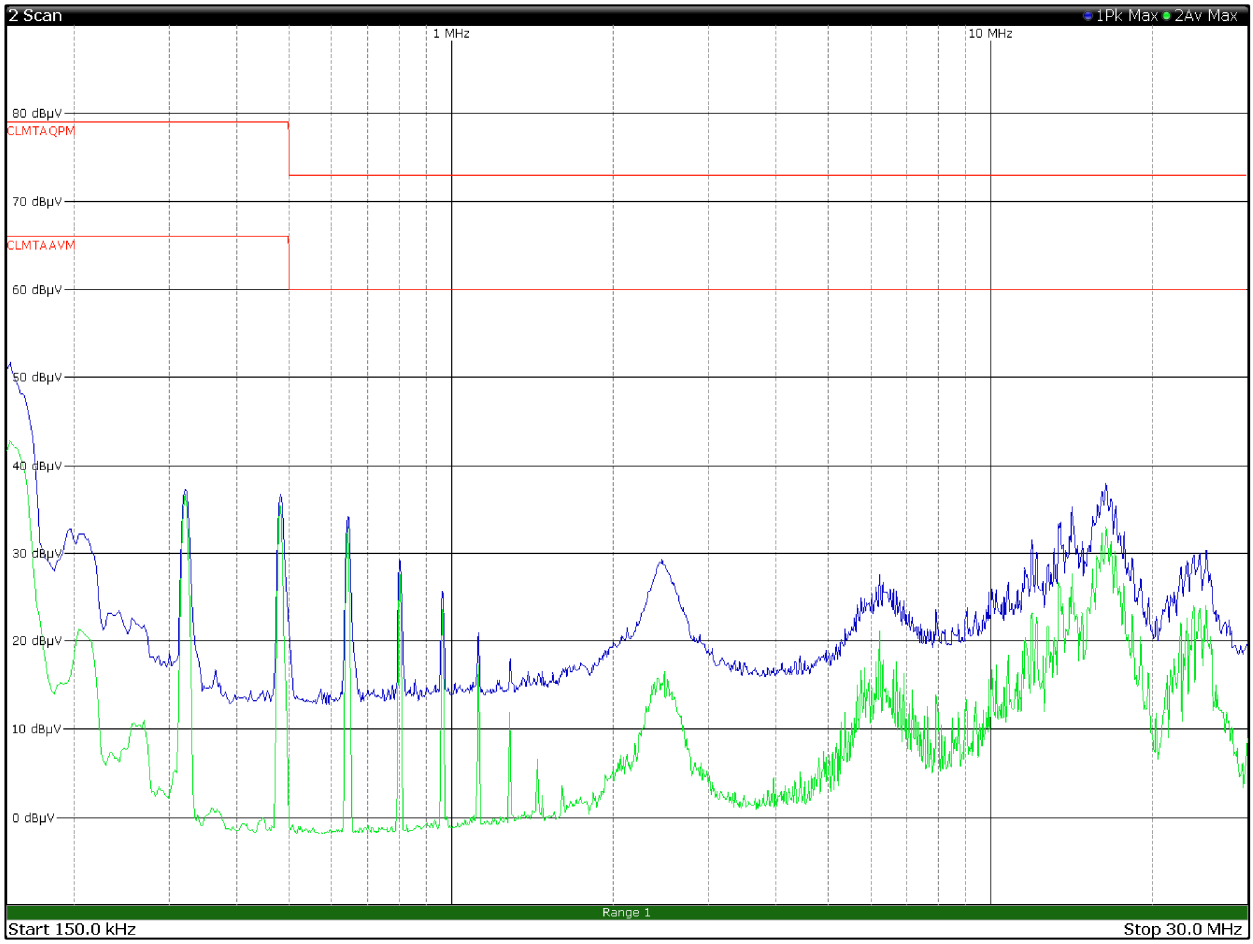

Test point:	Ethernet line	Verdict: Pass
Operation mode:	1	
Configuration mode:	1	
Remarks:	--	

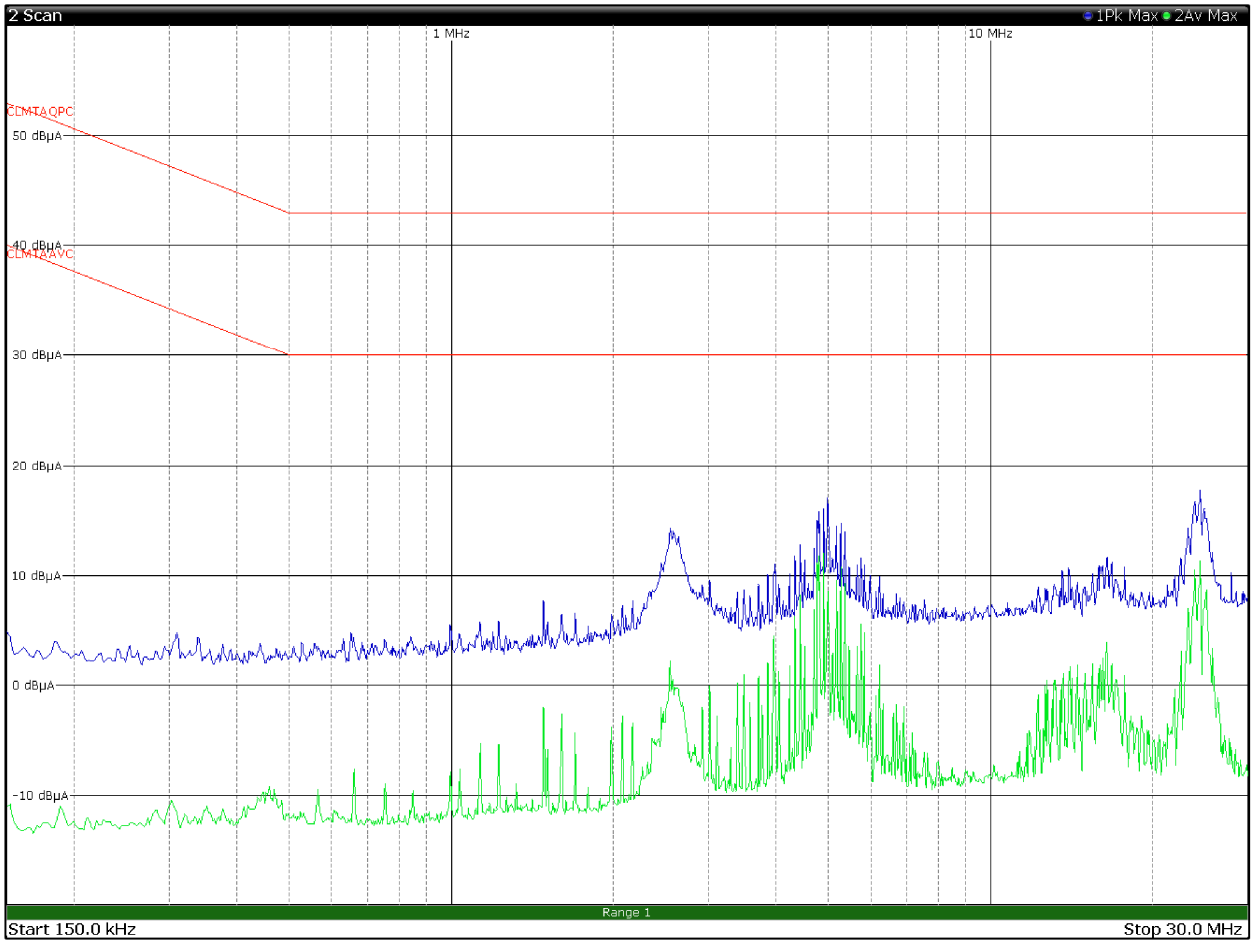

5.3 Discontinuous disturbance

5.3.1 Photo documentation of the test set-up

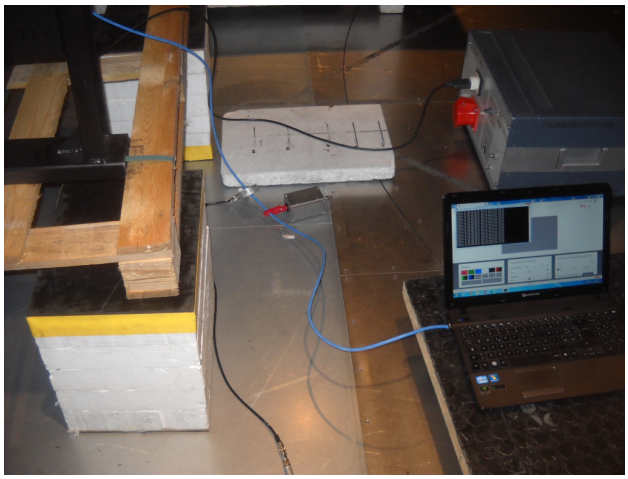

5.3.2 Test method according to EN 55014-1

Measurement of a disturbance, the amplitude of which exceeds the quasi-peak limit of continuous disturbance, the duration of which is not longer than 200 ms which is separated from a subsequent disturbance by at least 200 ms.

5.3.3 Limits for low voltage AC mains port

The limits for discontinuous disturbance depend mainly on the character of the disturbance and on the click rate N. For the first measurement with the limit L and a time of measurement equal to T or 120 minutes, the click rate is obtained with N = (Number of clicks or switching operation / Time of measurement).

Appliance which has a click rate N less than 5 clicks per minute, and which has instantaneous switching (90% clicks shorter than 10 ms and none longer than 20ms) shall be deemed to comply with the limits, regardless of the click's amplitude. Otherwise a second measurement is needed.

For the second measurement, the click limit Lq is obtained by increasing the relevant limit L with 44 dB for N < 0.2, or 20log(30 / N) for 0.2 ≤ N < 30. With the limit Lq during the same time T or 120 minutes, the number of authorized clicks is equal to N2 ≤N1/4

5.3.4 Test result

Verdict:	☒ P ☐ F ☐ N
Frequency range:	0.15MHz - 30MHz
Kind of test site:	Shielded room
Remarks:	

5.3.5 Test protocol

Test point:	Phase line	Verdict:	Pass
Operation mode:	1		
Configuration mode:	1		
Remarks:	--		

First run

Frequency (MHz)	Limit L (dBµV)	Number of clicks			Switching operations	Time (min)	Click rate N
		< 10 ms	10ms to 20ms	> 20 ms			
0.15	79	0	0	0	-	120	0
0.5	73	0	0	0	-	120	0
1.4	73	0	0	0	-	120	-
30	73	0	0	0	-	120	-

Second run not required

Test point:	Neutral line	Verdict:	Pass
Operation mode:	1		
Configuration mode:	1		
Remarks:	--		

First run

Frequency (MHz)	Limit L (dBµV)	Number of clicks			Switching operations	Time (min)	Click rate N
		< 10 ms	10ms to 20ms	> 20 ms			
0.15	79	0	0	0	-	120	0
0.5	73	0	0	0	-	120	0
1.4	73	0	0	0	-	120	-
30	73	0	0	0	-	120	-

Second run not required

5.3.6 Test equipment used

Equipment	Manufacturer	Model	Serial N°
EMI receiver (2 Hz ÷ 44 GHz)	R&S	ESW44	101620
LISN 9 kHz ÷ 30 MHz	R&S	ESH2-Z5	872 460/041
Current clamp probe	R&S	ESH2-Z1	891 923/18
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530
Shielded room	Siemens	10m control room	1947

5.4 Harmonics of current

5.4.1 Photo documentation of the test set-up

5.4.2 Test method according to EN 61000-3-2

This test consists on the measurement of harmonics components of the input current which may be produced by equipment having an input current up to and including 16 A per phase and intended to be connected to public low-voltage distribution systems. The equipment is tested under specified conditions of operation.

5.4.3 Limits for low voltage AC mains port - Class A equipment

Harmonic order (n)	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15 ≤ n ≤ 39	0.15 x 15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8 ≤ n ≤ 40	0.23 x 8/n

5.4.4 Limits for low voltage AC mains port - Class B equipment

Harmonic order (n)	Maximum permissible harmonic current (A)
Odd harmonics	
3	3.45
5	1.71
7	1.155
9	0.60
11	0.495
13	0.315
15 ≤ n ≤ 39	0.225 x 15/n
Even harmonics	
2	1.62
4	0.645
6	0.45
8 ≤ n ≤ 40	0.345 x 8/n
Supplementary information:	

5.4.5 Test result

Verdict:	☒ P ☐ F ☐ N
Frequency range:	0 kHz – 2.0 kHz
Kind of test site:	Laboratory
Class:	☒ A ☐ B
Remarks:	

5.4.6 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Mains analyzer	EMC Partner	Harmonics 1000	016

5.4.7 Test protocol

Operation mode: 1 Verdict: Pass
Configuration mode: 1
Remarks: --

Urms =	230.3V	Freq =	50.016	Range:	2 A
Irms =	0.329A	Ipk =	0.597A	cf =	1.813
P =	41.18W	S =	75.79VA	pf =	0.543
THDi =	28.6 %	THDu =	0.10 %	Class A	

Test - Time : 5 min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Irms [A]	Imax [A]	Limit [A]	Status
1	50	0.3160	0.3152	0.3302		
2	100	0.0331	0.0330	0.0347	1.0800	
3	150	0.0714	0.0714	0.0714	2.3000	
4	200	0.0000	0.0038	0.0039	0.4300	
5	250	0.0277	0.0276	0.0297	1.1400	
6	300	0.0000	0.0033	0.0034	0.3000	
7	350	0.0175	0.0175	0.0176	0.7700	
8	400	0.0000	0.0016	0.0020	0.2300	
9	450	0.0149	0.0149	0.0150	0.4000	
10	500	0.0000	0.0005	0.0006	0.1840	
11	550	0.0111	0.0111	0.0120	0.3300	
12	600	0.0000	0.0013	0.0013	0.1533	
13	650	0.0092	0.0092	0.0093	0.2100	
14	700	0.0000	0.0005	0.0007	0.1314	
15	750	0.0087	0.0088	0.0088	0.1500	
16	800	0.0000	0.0004	0.0005	0.1150	
17	850	0.0073	0.0073	0.0076	0.1324	
18	900	0.0000	0.0010	0.0010	0.1022	
19	950	0.0064	0.0063	0.0066	0.1184	
20	1000	0.0000	0.0004	0.0006	0.0920	
21	1050	0.0059	0.0059	0.0060	0.1071	
22	1100	0.0000	0.0005	0.0006	0.0836	
23	1150	0.0053	0.0052	0.0056	0.0978	
24	1200	0.0000	0.0004	0.0005	0.0767	
25	1250	0.0001	0.0048	0.0050	0.0900	
26	1300	0.0000	0.0002	0.0004	0.0708	
27	1350	0.0000	0.0046	0.0048	0.0833	
28	1400	0.0000	0.0005	0.0005	0.0657	
29	1450	0.0000	0.0044	0.0045	0.0776	
30	1500	0.0000	0.0004	0.0005	0.0613	
31	1550	0.0000	0.0038	0.0042	0.0726	
32	1600	0.0000	0.0004	0.0004	0.0575	
33	1650	0.0000	0.0038	0.0039	0.0682	
34	1700	0.0000	0.0004	0.0004	0.0541	
35	1750	0.0000	0.0035	0.0037	0.0643	
36	1800	0.0000	0.0005	0.0005	0.0511	
37	1850	0.0000	0.0032	0.0034	0.0608	
38	1900	0.0000	0.0004	0.0005	0.0484	
39	1950	0.0000	0.0033	0.0034	0.0577	
40	2000	0.0000	0.0005	0.0005	0.0460	

5.5 Voltage changes, voltage fluctuations and flicker

5.5.1 Photo documentation of the test set-up

5.5.2 Test method according to EN / IEC 61000-3-3

This test consists on the measurement of voltage changes, voltage fluctuations and flicker which may be produced by equipment having an input current ≤ 16 A per phase, and intended to be connected to public low-voltage distribution systems. The equipment is tested under specified conditions of operation.

5.5.3 Limits for low voltage AC mains port

The value of Pst shall be not greater than 1.0.
The value of Plt shall be not greater than 0.65.
The value of d(t) during a voltage change shall not exceed 3.3 % for more than 500 ms.
The relative steady-state voltage change, dc shall not exceed 3.3 %.
The maximum relative voltage change dmax shall not exceed:

a) 4 % without additional conditions
b) 6 % for equipment which is switched manually, or switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption
c) 7 % for equipment which is attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as mowers, portable tools such as electric drills), or switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

5.5.4 Test result

Verdict:	☒ P ☐ F ☐ N
Frequency:	50 Hz
Kind of test site:	Laboratory
Remarks: ---	

5.5.5 Test protocol

Operation mode: 1 Verdict: Pass
Configuration mode: 1
Remarks: -

Urms =	230.3V	Freq =	50.031	Range:	2 A
Irms =	0.327A	Ipk =	0.596A	cf =	1.821
P =	41.13W	S =	75.34VA	pf =	0.546

Test - Time : 1 x 10 min = 10 min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits :	Plt :	0.65	Pst :	1.00
	dmax :	4.00 %	dc :	3.00 %
	dtLim:	3.00 %	dt>Lim:	200ms

Test completed, Result: PASSED

	Pst	dmax [%]	dc [%]	dt>Lim [ms]
1	0.072	0.000	0.010	0.000

5.5.6 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Mains analyzer	EMC Partner	Harmonics 1000	016

5.6 Immunity to electrostatic discharges

5.6.1 Photo documentation of the test set-up

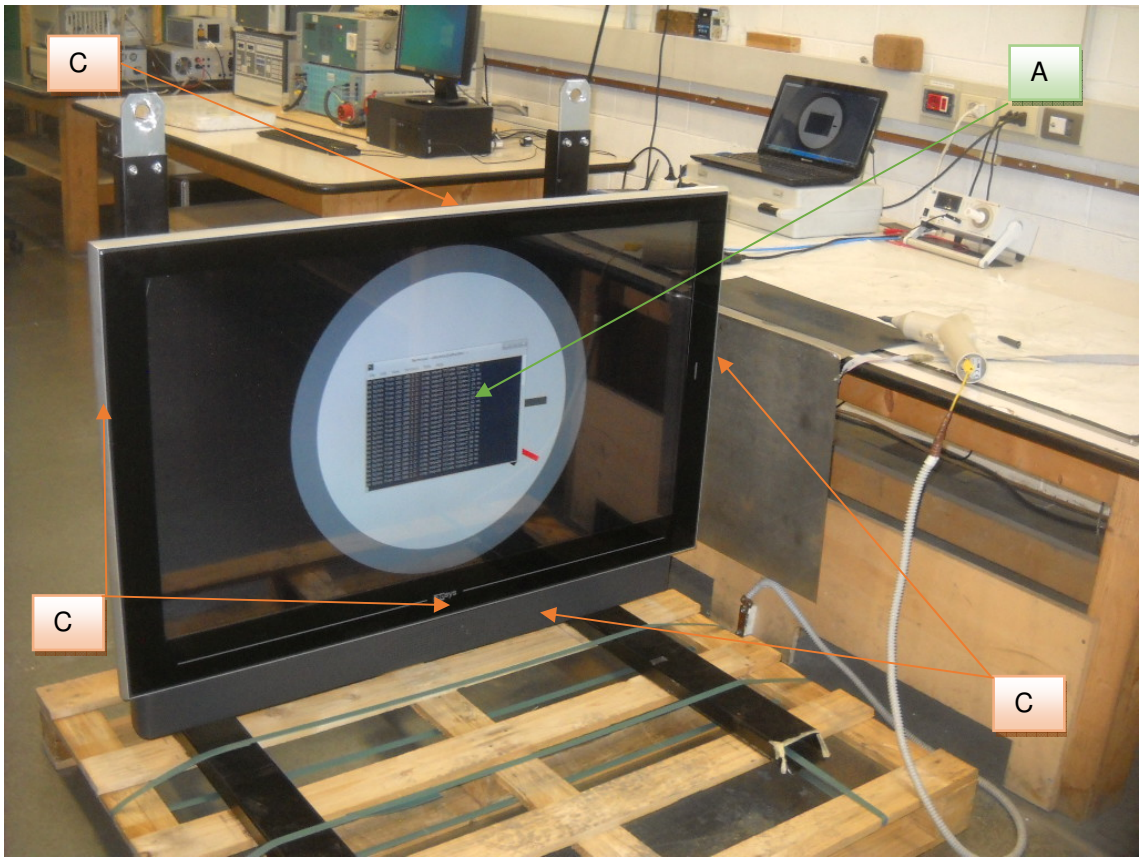

C = Contact discharge – A = Air discharge

5.6.2 Test method according to EN 61000-4-2

The test is intended to demonstrate the immunity of equipment subjected to static electricity discharges from operators directly and to adjacent objects. The table-top equipment under test is placed on a wooden table, 0.8 m high, standing on the ground reference plane. A horizontal coupling plane (HCP) is placed on the table. The EUT and the cables are isolated from the coupling plane by an insulating support 0.5 mm thick. The floor standing equipment is isolated from the ground reference plane by an insulating support about 0.1 m thick. The vertical coupling plane (VCP) of dimensions 0.5 m x 0.5 m is placed parallel to, and positioned at a distance of 0.1 m from, the EUT. Air discharges are applied to non-metallic parts of the system. Contact discharges are applied to all accessible metallic parts. Discharges are also applied to the Horizontal and Vertical Coupling Planes.

5.6.3 Test specification

Contact discharge voltage:	6 kV	
Air discharge voltage:	8 kV	
Discharge impedance:	330 Ω / 150 pF	
Time between successive discharges:	≥ 1 s	
Number of discharges:	≥ 10	
Type of direct discharge:	air discharge	contact discharge
Type of indirect discharge:	contact discharge	
Polarity:	positive	negative

5.6.4 Test result

Discharge location	Type of discharge
Horizontal coupling plane (HCP)	Contact
Vertical coupling plane (VCP)	Contact
Enclosure	Contact
Display	Air

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	B
Operation mode:	1
Configuration mode:	1
Kind of test site:	Laboratory
Remarks: the performance criterion achieved during test was A, nothing happened during test.	

5.6.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
ESD Test system	EMC Partner	ESD3000	252

5.7 Immunity to radiated, radio-frequency, electromagnetic field

5.7.1 Photo documentation of the test set-up

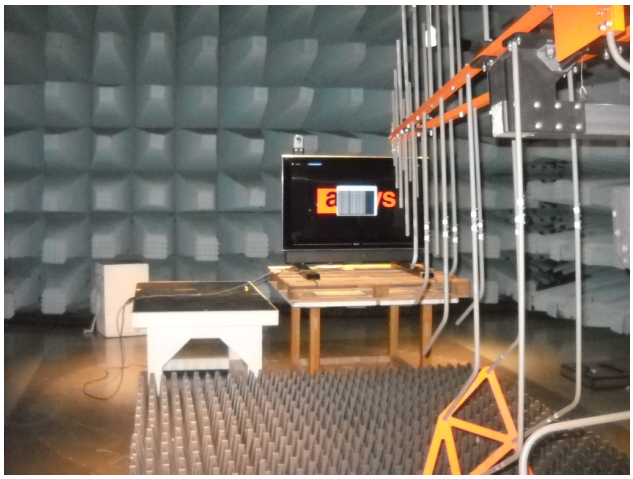

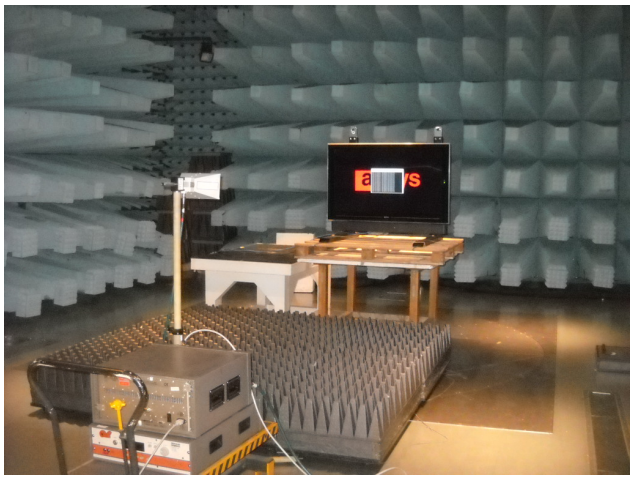

5.7.2 Test method according to EN 61000-4-3

The test allows estimating of the radiated immunity of electrical and electronic equipment to electromagnetic disturbances coming from intended radio-frequency (RF) transmitters in the frequency range 30 MHz to 6000 MHz. The interference is applied on the enclosure of the equipment by using transmitting antennas. Measurements are made in a fully anechoic chamber and the indicated field strength is pre-calibrated prior to placement of the system under test.

5.7.3 Test specification

Frequency range:	80-800 MHz	800-1000 MHz	1400-2000 MHz	2000-2700 MHz	5100-6000 MHz
Field strength:	10 V/m	20 V/m	10 V/m	5 V/m	3 V/m
EuT - antenna separation:	3 m				
Modulation:	AM with 80 % in depth and 1 kHz sine wave				
Frequency step:	1 % with 2 s dwell time				
Antenna polarisation:	horizontal		vertical		
Antenna position:	front	rear	left	right	

5.7.4 Test result

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	A
Operation mode:	1
Configuration mode:	1
Kind of test site:	Anechoic chamber
Remarks: the performance criterion achieved during test was A, nothing happened during test.	

5.7.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Log periodic antenna (20 ÷ 6000 MHz)	AR	AT6026A	0330878
Microwave horn antenna (1 ÷ 18 GHz)	Schwarzbeck	BBHA 9120 D	D1874
RF generator (0.1 ÷ 12750 MHz)	R&S	SMB100A	180431
RF Amplifier (10KHz ÷ 225MHz)	AR	1000A225	0336745
RF Amplifier (200 MHz÷1000 MHz)	IFI	CMX100010-SMCC1000	L448A-0108
RF amplifier (0.8 ÷ 4.2 GHz)	AR	50S1G4A	301049
Broadband amplifier (4.2 ÷ 18 GHz)	AR	20T4G18	300792
Bidirectional Coaxial coupler	AR	DC7144	301249
Power sensor	R&S	NRP18AN	100990
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530
Shielded room	Siemens	10m control room	1947

5.8 Immunity to electrical fast transient/burst

5.8.1 Photo documentation of the test set-up

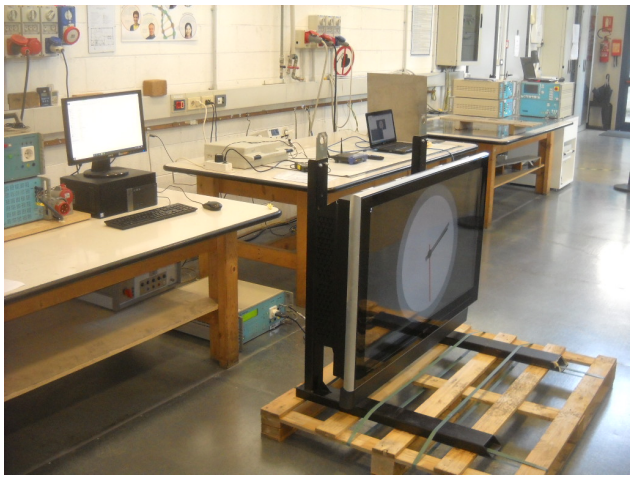

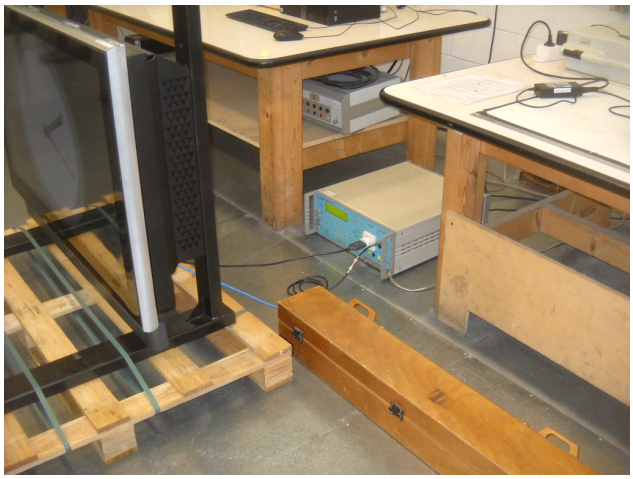

5.8.2 Test method according to EN 61000-4-4

The test is intended to demonstrate the immunity of equipment subjected to types of transient disturbances such as those originating from switching transients (interruption of inductive loads, relay contact bounce….). The bursts are applied on the mains supply port by using a coupling decoupling network and on signal and control lines ports by using a capacitive clamp. Measurements are made on a ground plane.

5.8.3 Test specification

Test voltage:	2 kV	
Burst frequency:	5.0 kHz	
Coupling duration:	≥ 60 s	
Polarity:	positive	negative

5.8.4 Test result

Coupling point	Level	Coupling devices	Verdict
AC mains and Earth port	± 2 kV	Network	P
Ethernet line	± 2 kV	Clamp	P

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	A
Operation mode:	1
Configuration mode:	1
Kind of test site:	Laboratory
Remarks: the performance criterion achieved during test was A, nothing happened during test. Added a ferrite code RKCF-08-A5 (11093016) on the Ethernet cable.	

5.8.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Pulse generator	EMC partner	Transient 2000	849
Coupling clamp	Schaffner	CDN 125	245 9219

5.9 Immunity to surge

5.9.1 Photo documentation of the test set-up

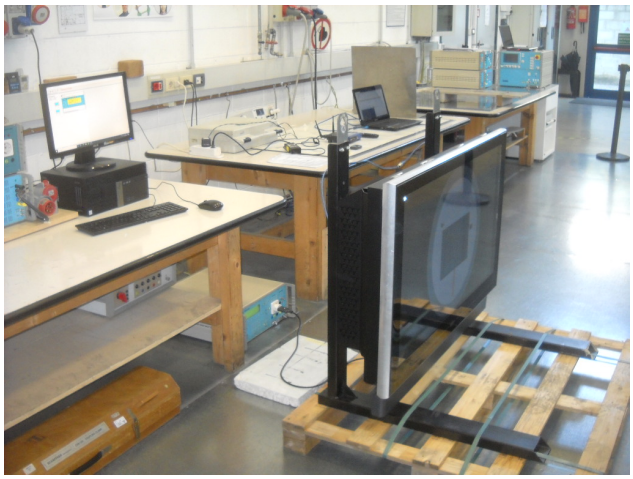

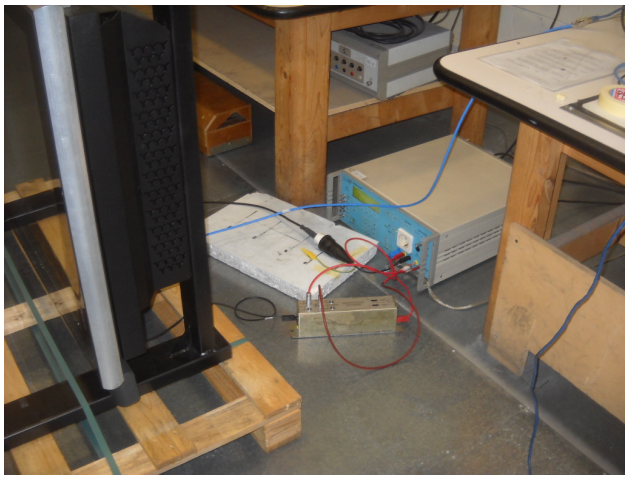

5.9.2 Test method according to EN 61000-4-5

The test allows estimating of the conducted immunity of electrical and electronic equipment to unidirectional surges caused by over voltages from switching and lighting transients. The interference is applied on symmetrical and unsymmetrical modes on mains supply port by using coupling decoupling network. For a.c. power ports, five positive surges and five negative surges are applied at each of phases of the a.c. waveform: 0°, 90°, 180° and 270°. Each surge was applied 60 seconds after the previous surge.

5.9.3 Test specification for power input ports

Pulse amplitude for line to line surge:	1 kV with a source impedance of 2 Ω + 18 µF	
Pulse amplitude for line to ground surge:	2 kV with a source impedance of 12 Ω + 9 µF	
Number of surges:	5 surges/polarity	
Repetition rate:	60 s	
Rise time:	1.2 µs	
Time to half value:	50 µs	
Polarity:	positive	negative

5.9.4 Test specification for signals ports

Pulse amplitude for line to ground surge:	2 kV with a source impedance of 42 Ω + 0.5 µF	
Number of surges:	5 surges/polarity	
Repetition rate:	60 s	
Rise time:	1.2 µs	
Time to half value:	50 µs	
Polarity:	positive	negative

5.9.5 Test result

Coupling point	Level	Impedance	Verdict
AC mains – line to line	1 kV	2 Ω + 18µF	P
AC mains – line to earth	2 kV	12 Ω + 9µF	P
Ethernet line – shield to earth	2 kV	Direct on the shield	P

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	B
Operation mode:	1
Configuration mode:	1
Kind of test site:	Laboratory
Remarks: the performance criterion achieved during test was A, nothing happened during test.	

5.9.6 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Pulse generator	EMC partner	Transient 2000	849
Coupling network	Schaffner	CDN 116	149 9318

5.10 Immunity to conducted disturbances, induced by radio-frequency fields

5.10.1 Photo documentation of the test set-up

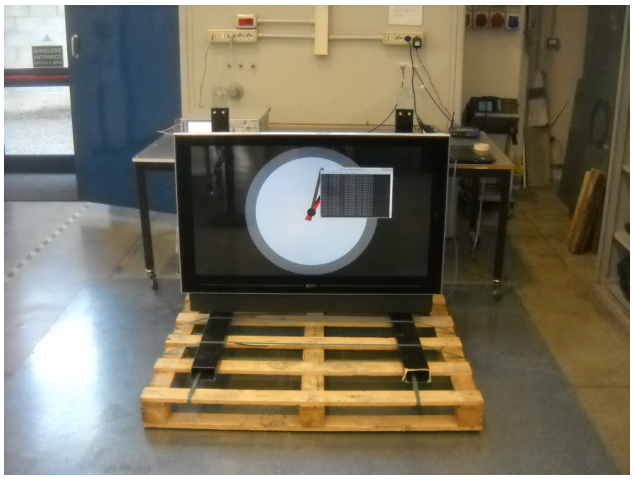

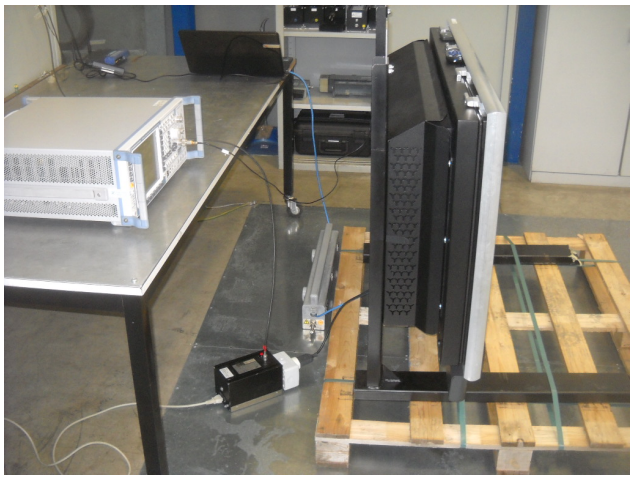

5.10.2 Test method according to EN 61000-4-6

The test allows estimating of the conducted immunity of electrical and electronic equipment to electromagnetic disturbances coming from intended radio-frequency (RF) transmitters in the frequency range 150 kHz to 80 MHz. The interference is applied on mains supply, signal line and earth connection ports by using coupling decoupling networks or a clamp. Measurements are made on a ground plane. The EUT was located 10cm above the reference ground plane and any associated I/O cables attached to the EUT are located between 30mm and 50mm above the ground plane. The indicated field is pre-calibrated prior to placement of the system under test.

5.10.3 Test specification

Test voltage:	10 V
Frequency range:	0.15 MHz to 80 MHz
Modulation:	AM with 80 % in depth and 1 KHz sine wave
Frequency step:	1 % with 2 s dwell time

5.10.4 Test result

Coupling point	Coupling and decoupling devices	Verdict
AC mains and Earth port	M3	P
Ethernet line	EM-CLAMP	P

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	A
Operation mode:	1
Configuration mode:	1
Kind of test site:	Laboratory
Remarks: the performance criterion achieved during test was A, only change of the fans speed occurs.	

5.10.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Coupling/decoupling network	EM Test	CDN M2 / M3	0307-16
EM injection clamp	FCC	F203I-23mm	121239
RF Conducted immunity test equipment	EM Test	CWS500 CSI	V0710102305
Attenuator 6dB	EM Test	ATT6/75	0206-18
Shielded room	Siemens	Conducted immunity test room	68

5.11 Immunity to power frequency magnetic field

5.11.1 Photo documentation of the test set-up

5.11.2 Test method according to EN 61000-4-8

This test is intended to demonstrate the immunity of equipment when subjected to power frequency magnetic fields. The test magnetic field is obtained by a current flowing in an induction coil; the application of the test field to the EUT is by the immersion method.

5.11.3 Test specification

Test frequency:	16.7 Hz	50 Hz	0 Hz
Continuous field intensity:	100 A/m	100 A/m	300 A/m
Duration:	60 s for each axis		
Axis:	x-axis	y-axis	z-axis

5.11.4 Test result

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	A
Operation mode:	1
Configuration mode:	1
Kind of test site:	Helmholtz coils
Remarks: the performance criterion achieved during test was A, nothing happened during test.	

5.11.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Field strength meter	Maschek	ESM-100	971909-G
Transformer 240/24 V 2.5 KVA	Eletras	220/24	2.459
Variac	RS	WCV 8E-1	3/122017
Helmholtz induction coil antenna	G.I.E.	IEC 1000-4-8	111962
Field strength meter	Maschek	ESM-100	971909-G
AC power source	ZENONE	GVS 300 GL	0000000446

5.12 Immunity to voltage dips and interruptions

5.12.1 Photo documentation of the test set-up

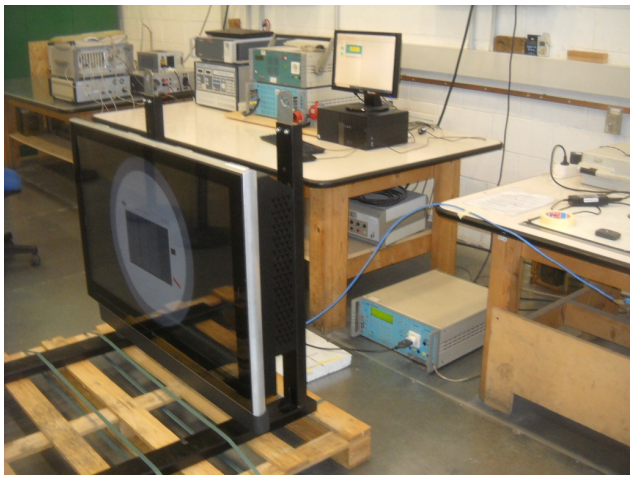

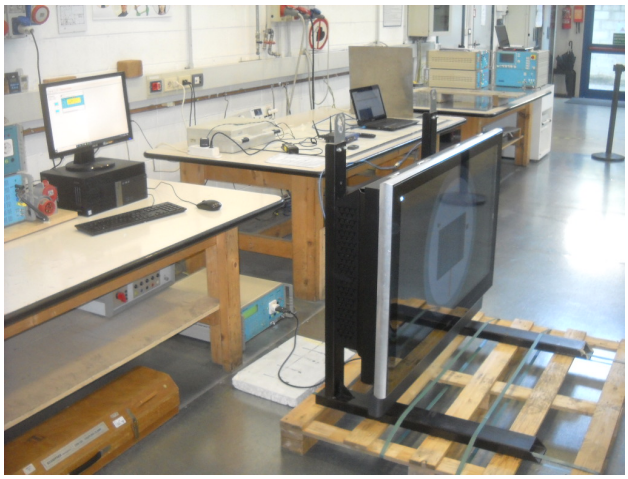

5.12.2 Test method according to EN 61000-4-11

The test allows estimating of the conducted immunity of electrical and electronic equipment connected to low-voltage power supply networks for voltage dips and short interruptions. Testing is performed with the product connected directly to a generator capable of simulating the voltage drops and interrupts as described.

5.12.3 Test specification

Nominal Mains Voltage	230 Vac
Rated frequency	50 Hz
Number of voltage dips and interruptions	3
Sync Angle	0°

5.12.4 Test result

	Level of reduction	Residual voltage	Duration	Performance criterion	Verdict
1	100%	0%	0.5 cycle	A	P
2	100%	0%	1 cycle	C	P
3	30%	70%	500 ms	C	P
4	100%	0%	5 sec	C	P
5	30%	70%	1 cycle	C	P

Verdict:	☒ P ☐ F ☐ N
Operation mode:	1
Configuration mode:	1
Kind of test site:	Laboratory
Remarks: the performance criterion achieved during test was A, nothing happened during test, except for test 4 in which the EUT switch off.	

5.12.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Pulse generator	EMC partner	Transient 2000	849

5.13 Immunity to pulse magnetic field

5.13.1 Photo documentation of the test set-up

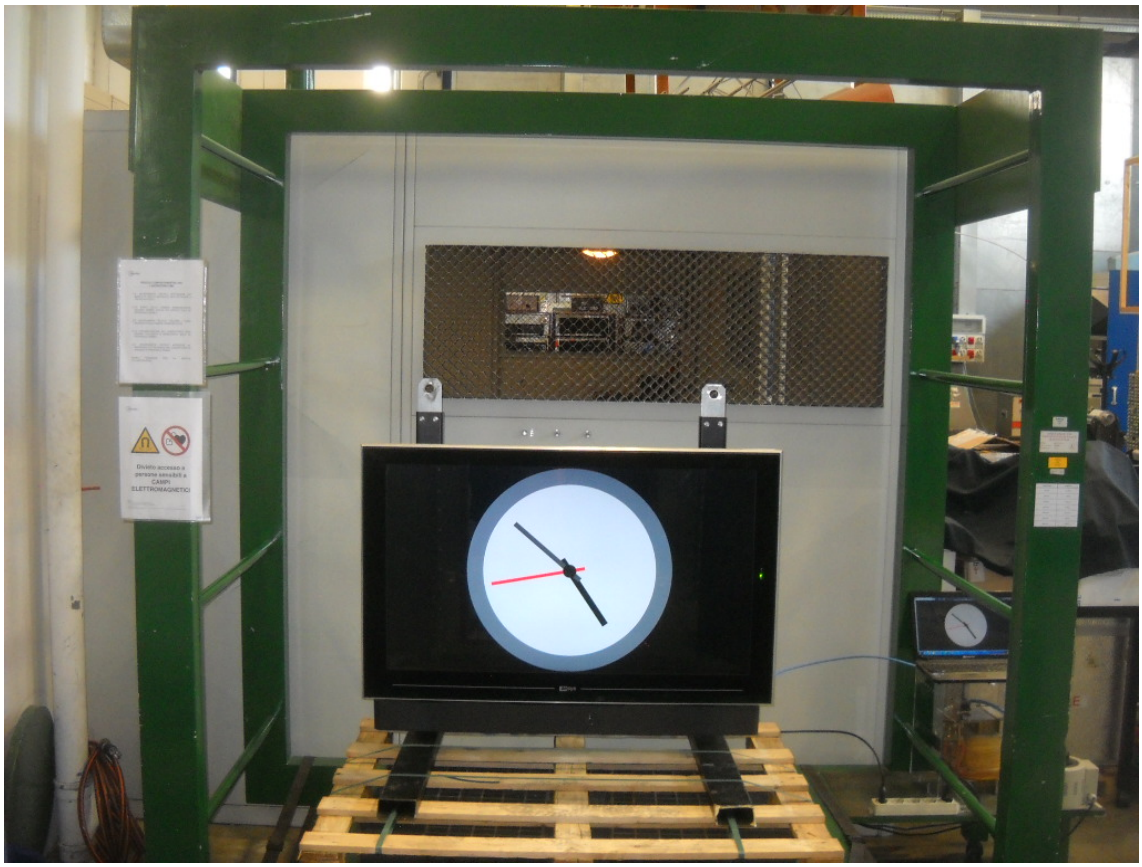

5.13.2 Test method according to EN 61000-4-9

The following tests are intended to demonstrate the immunity of equipment when subjected to impulse magnetic fields related to the specific location and installation condition of the equipment (e.g. proximity of equipment to the disturbance source). Pulse magnetic fields are generated by lightning strokes on buildings and other metal structures including aerial masts, earth conductors and earth networks and by initial faults transients in L.V., M.V. and H.V. electrical systems. In H.V. sub-stations, a pulse magnetic field may also be generated by the switching of H.V. bus-bars and lines by circuit breakers. The test is mainly applicable to electronic equipment to be installed in electrical plants as well as in telecontrol centres. It is not relevant for distribution network equipment. The test magnetic field is obtained by a current flowing in an induction coil; the application of the test field to the EUT is by the immersion method.

5.13.3 Test specification

Rise time of the pulse:	6.4 µs ± 30%		
Durations of the pulse:	16 µs ± 30%		
Field intensity:	300 A/m		
Number of pulses:	5 pulses for polarity		
Axis:	x-axis	y-axis	z-axis
Repetition rate:	30 s		
Polarity:	positive	negative	

5.13.4 Test result

Verdict:	☒ P ☐ F ☐ N
Performance Criterion:	A
Operation mode:	1
Configuration mode:	1
Kind of test site:	Helmholtz coils
Remarks: the performance criterion achieved during test was A, nothing happened during test.	

5.13.5 Test equipment used

Equipment	Manufacturer	Model	Serial N°
Pulse generator	EMC partner	Transient 2000	849
Helmholtz induction coil antenna	G.I.E.	IEC 1000-4-8	111962

6 EUT PHOTOS

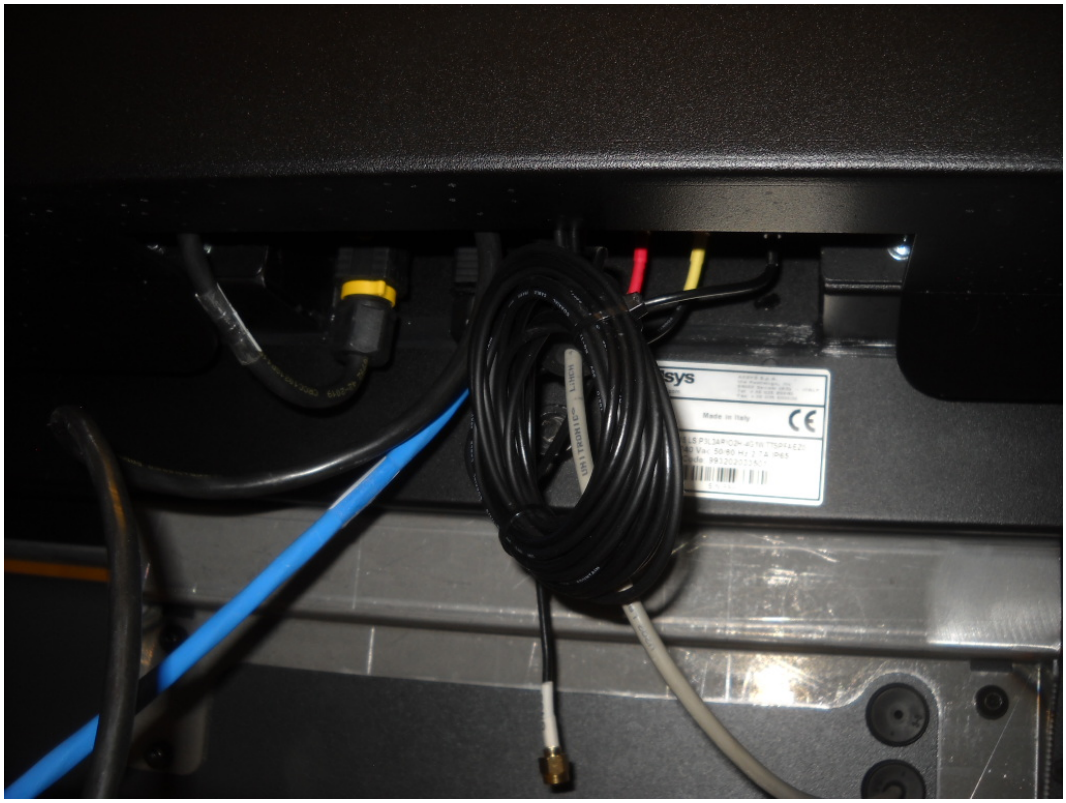

aesys
Made in Italy
Slim Soundbar 48" – MONO
8 – 30 Vdc 3A
Code: 993301701000
S/N 00000803866

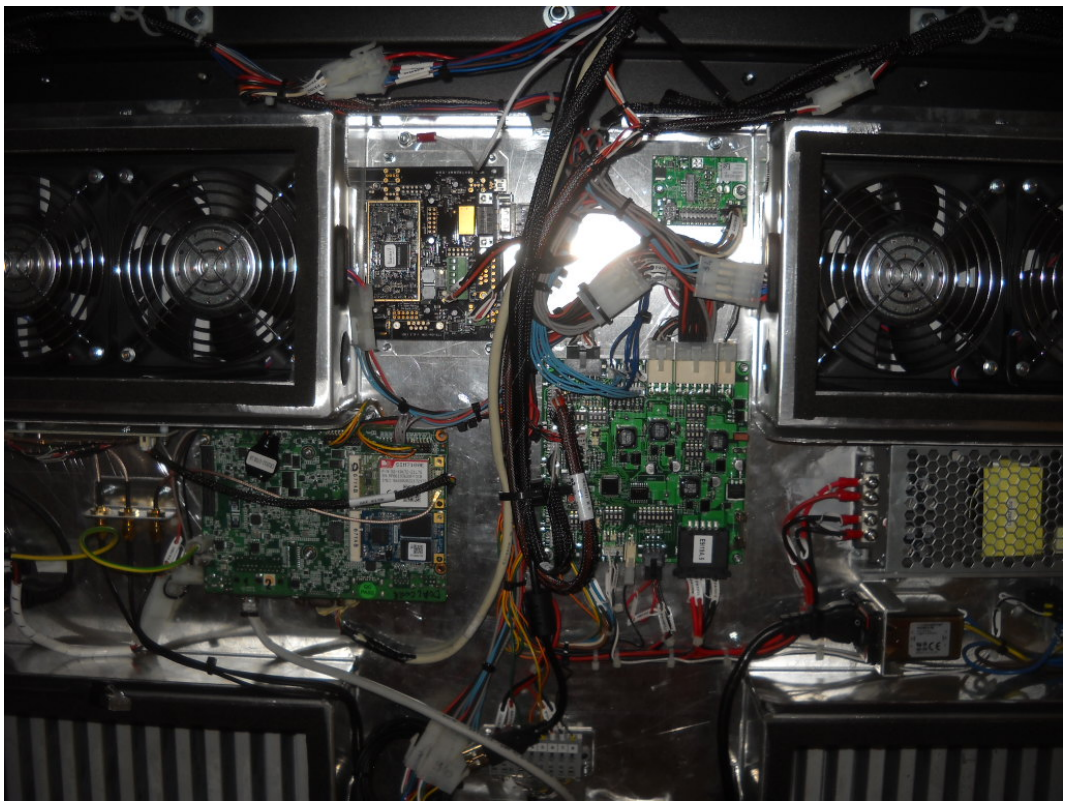

End of report